

PACALL: Passive Capture for Ubiquitous Learning Log Using SenseCam

Bin HOU^{a*}, Hiroaki OGATA^a, Toma KUNITA^a, Mengmeng LI^a, Noriko UOSAKI^a
& Yoneo YANO^a

^a Graduate School of Advanced Technology and Science, The University of Tokushima,
Japan

*hou-bin@iss.tokushima-u.ac.jp

Abstract: In our previous works, we developed a system named SCROLL in order to log, organize, recall and evaluate the learning log. However up to now, we just use an active mode to record logs. Learners must take a capture of learned contents consciously and most of learning chances is lost unconsciously. In order to solve this problem, we started a project named PACALL (Passive Capture for Learning Log) in order to have a passive capture using SenseCam. With the help of SenseCam, learner's activity can be captured as a series of images. We also developed a system to help a learner find the important images by analyzing sensor data and images processing technology. Finally, the selected images will be uploaded to the current SCROLL system as ubiquitous learning logs. This research suggests that SenseCam can be used to do passive capture of learning experiences and workload of reflection can be reduced by analyzing sensor data of SenseCam.

Keywords: passive capture, learning log, life log, sensor data, SenseCam, ubiquitous learning

Introduction

Learning Log was originally designed for children as a personalized learning resource ("Learning log - Wikipedia, the free encyclopedia," n.d.). It was set by teachers to help their students record their thinking and learning. In this learning log, the logs were usually visually written notes of learning journals. Since 2009, we started our project named Ubiquitous Learning Log supported by PRESTO (Sakigake) JST (Japan Science and Technology Agency) (Ogata, Li, Hou, Uosaki, M.El-Bishouty Moushir, et al., 2010). We defined a ubiquitous learning log as a digital record of what a learner has learned in the daily life using ubiquitous technologies and proposed the SCROLL (System for Capturing and Reminding Of Learning Log) (Ogata, Li, Hou, Uosaki, M.El-Bishouty Moushir, et al., 2010) to help learners collect their learning experiences as ubiquitous learning objects (ULLOs). However, currently ULLOs are created by learners manually. Learners must record their learning experiences in the form of photo, video or other formats consciously. It is evident that learners cannot record all of the learning experiences in the system and most of them will be lost and forgotten.

In order to solve this problem, we attempt to introduce the concept of life log into this system. The notion of life log can be tracked back at least 60 years (Bush, 1945). It means to capture a person's entire life or large portions of life. It usually uses digital devices to record life log such as wearable cameras or video recorders. However, if there is any way that we can extract the learning part from it, the learning log will be more significant and more sufficient. Besides, our system captures the learning log beyond their consciousness and learners' burden will also be reduced.

In this research, we use SenseCam to have a passive capture. SenseCam is a prototype device under the development of Microsoft Research (Hodges et al., 2006). It is a small digital camera that is combined with a number of sensors to help to capture a series of images of the wearer's whole daily life at the proper time and it can be worn around the neck. Actually this device is designed for memory aid. The SenseCam itself has an algorithm for capturing images by a time trigger and other triggers that use sensor data. However, because SenseCam is designed for memory aid, it takes photos continuously even if it is dark or the situation is not been changed. The result is that there are so many photos that are duplicated or blurred or dark.

1. Related Works

MyLifeBits ("MyLifeBits - Microsoft Research," n.d.) is a Microsoft's project. The aim of this project is to implement Bush's Memex model (Bush, 1945) that proposed to store everything that you saw and you heard. MyLifeBits has a large amount of storage that can store email messages, web pages, books, photos, sounds, videos, etc. In addition, the MyLifeBits project team is also using SenseCam to have the passive capture of life log and upload the sensor information along with the photos to the MyLifeBits repository (Gemmell, Williams, Wood, Lueder, & Bell, 2004).

Fleck and Fitzpatrick (Fleck & Fitzpatrick, 2006) used SensorCam to support collaborative reflection. In their research, the students were asked to wear SenseCam when they played arcade games. After that, they did a reflection on their learning experiences. They found that SenseCam images were not only used to support memory aids but also can be used as resources for supporting the collaborative reflective discussion.

2. Research Design

2.1 Learning Process

The whole process of passive capture happens unconsciously. However it is no doubt that the photo capturing is not the whole process of learning. It is necessary for learners to look through the captured photos and find the learning contents with the help of system. After entering the information of the image such as title and description, this learning content will be saved into SCROLL system as a ULLO. Of course, the saved ULLOs need to be recalled to help learners to remember, but this is the feature of SCROLL. That is to say, a process of passive capture includes capture, reflect and store. Such process is called a PACALL frame. Figure 2.1 shows this model.

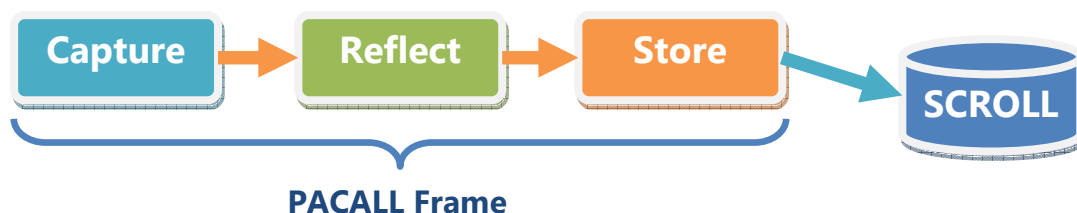


Figure 2.1 Model of Learning Process

2.2 Photo Classification and Sensor Data

In PACALL, we use SenseCam to have a passive capture of learner's daily life. However, since this device takes photos continuously, more than 200 photos will be taken in one hour, and more than 1500 photos in one day. Therefore, we propose a method to classify these photos by sensor data.

All photos are divided into 5 levels based on importance – manual, normal, duplicate, shake and dark. Manual means the photo is taken by pressing manual button consciously. When a learner takes a photo manually, it means that this photo must be important from his point of view. Normal means the photo is clear and can be used as learning log object. After excluding the duplicates, shake and dark, left photos are judged as normal. Duplicate means the photos are duplicated. Duplicated photos usually have same conditions. Shake means the photo is blurred. It usually happens when the light level is low and the camera shakes. Dark means the photo is taken with insufficient light and the photo is dark.

3. Implementation

In this research, the SenseCam that we are using is produced by Vicon Revue ("Vicon Revue | Memories for life," n.d.). When the SenseCam is connected to the computer, all photos will be imported into computer by software of SenseCam.

This system is programmed using Java and runs in Tomcat. When using this system, Tomcat accesses the repository of SensorCam photos directly and shows them in web browser.

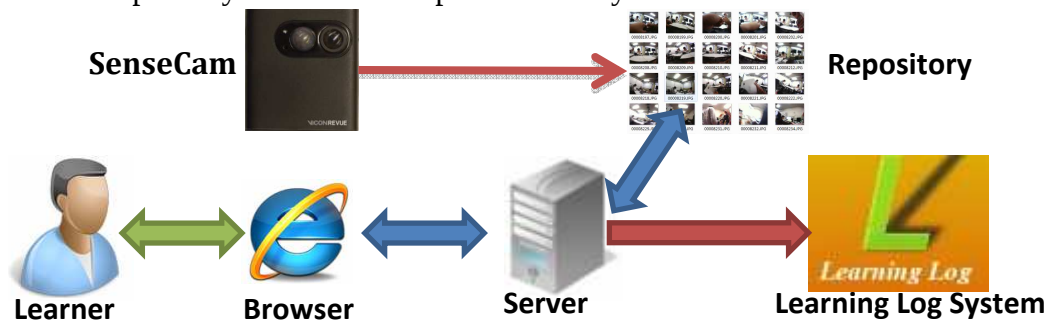


Figure 3.1 System Architecture

Figure 3.1 shows the system architecture. All the photos captured by SenseCam and sensor data are imported into repository. When a learner uses this system through browser, server accesses repository and analyzes the photos by sensor data, then returns the classified photos to learner. Then he selects proper photos and uploads them to learning log system through the server. We have a plan to use image processing technology to detect the photos which contains faces or texts.

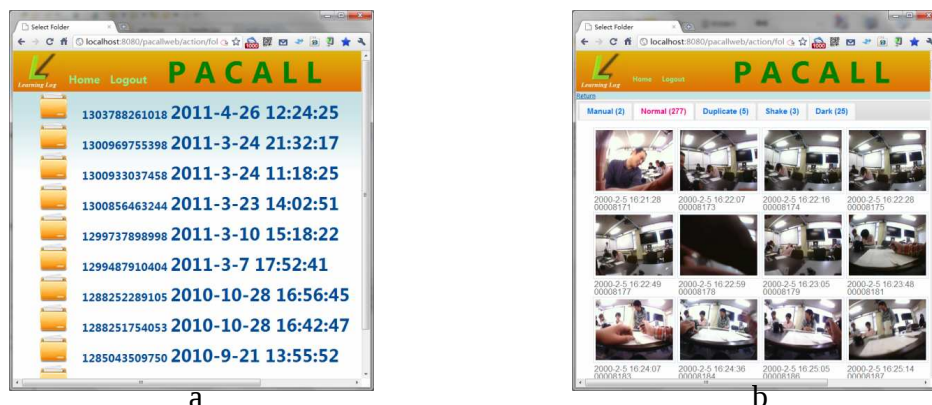


Figure 3.2 Interface of PACALL

When the system starts, folders will be shown to them including the name of the folder and imported time (Figure 3.2a). Each folder contains photos for a PACALL frame. On the page of Figure 3.2a, a learner selects a folder. After selecting one folder, the system fetches photos in this folder, and analyzing the sensor data, finally Figure 3.2b will be shown. All photos are classified into five tabs. He can switch between tabs and find proper photos. Finally, the selected photos will be uploaded to SCROLL system.

4. Conclusion and Future Work

In this paper, we introduced a project named PACALL that supports passive capture for learning log using SenseCam. We have designed a model of learning process in passive capture mode including capture, reflect, store. The PACALL system has been also developed in order to support reflection and reduce the workload of reviewing photos. During this research, we found that the SenseCam that originally designed for memory aid can be also used to capture learning log for passive mode. However, it usually takes too many photos, and many of them are duplicated or dark. Therefore, we must introduce other technology to help learners find out important photos. Currently, we are using sensor data to help us do it. In the future, we also use images processing technology to detect the contents of photos. Besides, current algorithm and user interface also need improvement. In addition, we plan to conduct a full evaluation experiment and invite students to use this system in the near future.

References

- [1] Bush, V. (1945). As we may think. the atlantic monthly, 176(1), 101–108.
- [2] Fleck, R., & Fitzpatrick, G. (2006). Supporting collaborative reflection with passive image capture. Supplementary Proceedings of COOP'06 (pp. 41-48).
- [3] Gemmell, J., Williams, L., Wood, K., Lueder, R., & Bell, G. (2004). Passive capture and ensuing issues for a personal lifetime store. Proceedings of the the 1st ACM workshop on Continuous archival and retrieval of personal experiences (pp. 48-55).
- [4] Hodges, S., Williams, L., Berry, E., Izadi, S., Srinivasan, J., Butler, A., Smyth, G., et al. (2006). SenseCam: A retrospective memory aid. UbiComp 2006: Proceedings (pp. 177-193). Presented at the UbiComp 2006, Orange County, CA, USA.
- [5] Hou, B., Ogata, H., Miyata, M., Li, M., Liu, Y., & Yano, Y. (2010). JAMIOLAS 3.0: Supporting Japanese Mimicry and Onomatopoeia Learning Using Sensor Data. International Journal of Mobile and Blended Learning (IJMBL), 2(1), 40–54.
- [6] Learning log - Wikipedia, the free encyclopedia. (n.d.). Retrieved May 18, 2011, from http://en.wikipedia.org/wiki/Learning_log
- [7] Mann, S., Picard, R. W., & Section, M. I. of T. P. C. (1995). On being 'undigital' with digital cameras: Extending dynamic range by combining differently exposed pictures. Citeseer.
- [8] Miyata, M., Ogata, H., Kondo, T., & Yano, Y. (2008). JAMIOLAS 2.0: Supporting to Learn Japanese Mimetic Words and Onomatopoeia with Wireless Sensor Networks. Proceedings of ICCE 2008 (pp. 643-650).
- [9] MyLifeBits - Microsoft Research. (n.d.). Retrieved May 19, 2011, from <http://research.microsoft.com/en-us/projects/mylifebits/>
- [10] Ogata, H., Li, M., Hou, B., Uosaki, N., Moushir, M.El-Bishouty, & Yano, Y. (2010). SCROLL: Supporting to Share and Reuse Ubiquitous Learning Log in the Context of Language Learning. Proc. of mLearn 2010 (pp. 40-47). Presented at the mLearn 2010, Malta.
- [11] Ogata, H., Li, M., Hou, B., Uosaki, N., Moushir, M.El-Bishouty, & Yano, Y. (2010). Ubiquitous Learning Log: What if we can log our ubiquitous learning? Proc. of ICCE 2010 (pp. 360-367). Presented at the ICCE 2010, Malaysia.
- [12] Ogata, H., Yin, C., & Yano, Y. (2006). JAMIOLAS: Supporting Japanese mimicry and onomatopoeia learning with sensors. Wireless, Mobile and Ubiquitous Technology in Education, 2006. WMUTE'06. Fourth IEEE International Workshop on (pp. 111-115).
- [13] Vicon Revue | Memories for life. (n.d.). Retrieved May 26, 2011, from <http://www.viconrevue.com/>